

GS-1005E & GS-1008E V2

Quick Installation Guide

05-2020 / v1.0

Edimax Technology Co., Ltd.

No. 278, Xinhu 1st Rd., Neihu Dist., Taipei City, Taiwan

Email: support@edimax.com.tw

Edimax Technology Europe B.V.

Fijenhof 2, 5652 AE Eindhoven, The Netherlands

Email: support@edimax.nl

Edimax Computer Company

3444 De La Cruz Blvd., Santa Clara, CA 95054, USA

Email: support@edimax.com

I. Product Information

The Edimax GS-1005E & GS-1008E V2 with 5 and 8 Gigabit ports are easy to setup and with no configuration or no Software needed. These two switches provide high-speed and reliable data transfer ideal for network connectivity in the home, small office, small-and-Medium business and enterprise environments.

You can find all supporting documents from the link below or via QR Code:

<https://www.edimax.com/download>




(Once you've visited the Edimax official website, please enter the model no. "GS-1005E or GS-1008E V2" into the search box to search for your product.)

Download

To select your product and find related download materials, enter the model number into the search box on the right side or follow the simple steps below:

*Feel free to contact us anytime if you need help or if you can't find your product.

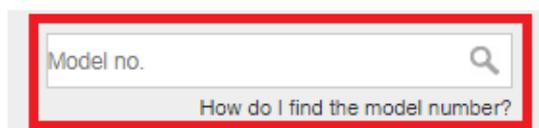A screenshot of a search box on a website. The search box is rectangular with a light gray background and a red border. Inside the box, the text "Model no." is visible on the left, and a magnifying glass icon is on the right. Below the search box, the text "How do I find the model number?" is displayed.

I-1. Package Contents

Before start using this product, please check if there is anything missing in the package, and contact your dealer to claim the missing item(s):





GS-1005E or GS-1008E V2

Quick Installation Guide



Power Adapter (5V)

I-2. Hardware Overview

GS-1005E:

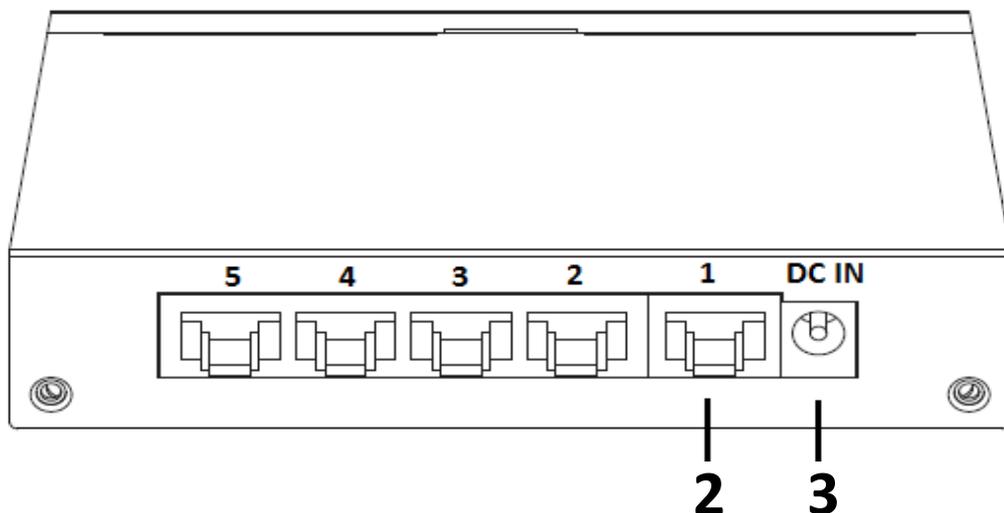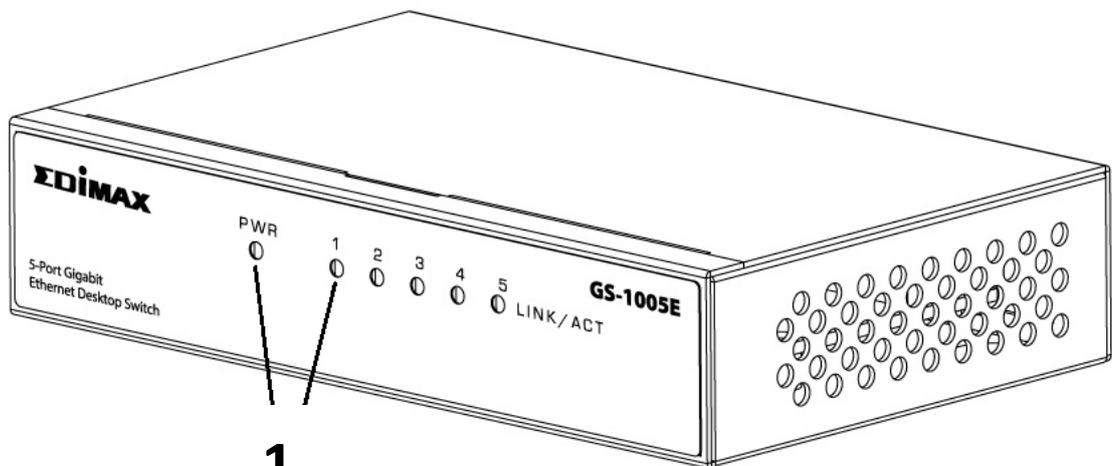

GS-1008E V2:

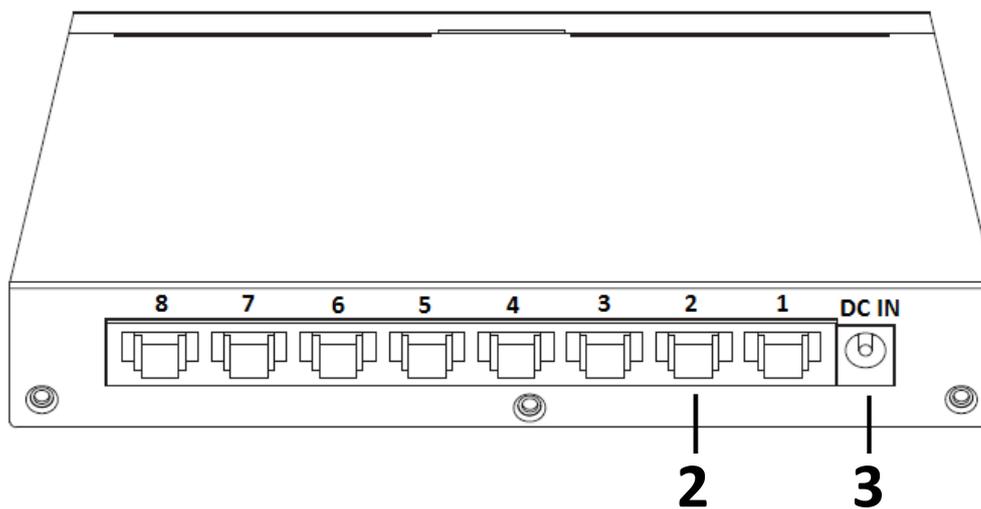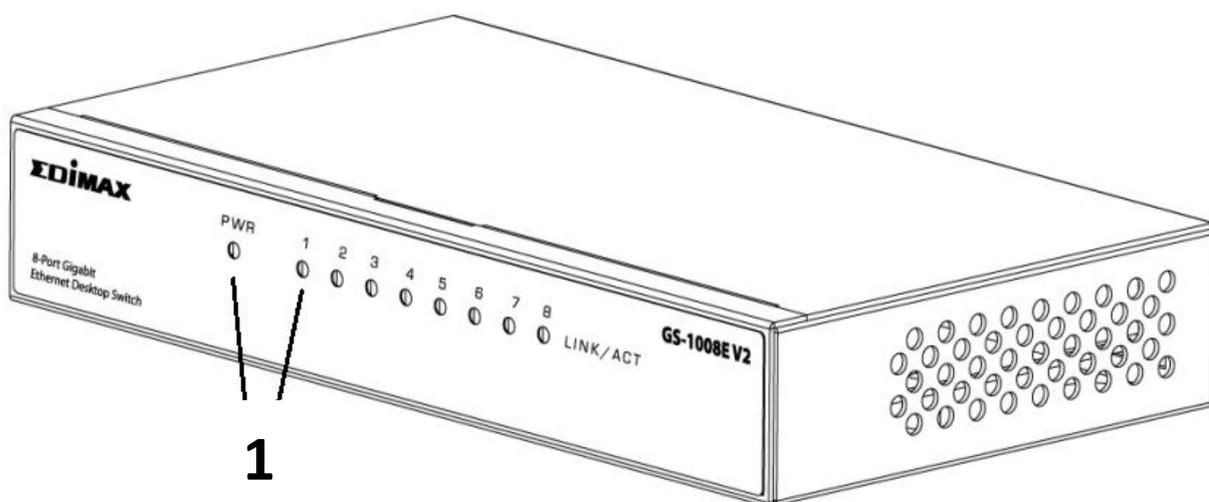

| No. | Description |
|-----|---------------------|
| 1 | LED (PWR, Link/ACT) |
| 2 | LAN Ports X5 or X8 |
| 3 | Power Jack |

I-3. LED Status

| Function | Color | Status | Description |
|----------|-------------|----------|--------------------------------------|
| LINK/ACT | Green/Amber | On | Port is connected |
| | | Off | Port is disconnected or link failure |
| | | Flashing | Sending or receiving data |
| PWR | Green | On | Power on |
| | | Off | Power off |

II. Hardware Installation

This section will guide you through the steps to set up the GS-1005E and GS-1008E V2.

1. Plug power adapter into a wall outlet.

NOTE: Ensure the “PWR” LED lights on Green.

2. Plug an Ethernet cable from the LAN port to the router.

NOTE: Ensure the “LAN” LED lights on Green.

3. Plug an Ethernet cable from the LAN port to any devices that have Ethernet port.

